

| SC-E-100 SERIES

ANALOGUE I/O TO COMMS GATEWAY



The SC-E-100 Ethernet Gateway module provides a straight forward method of interfacing analogue and digital process parameters to an Ethernet or RS232/485 network. The SC-E-100 allows the user to view the status of the individual inputs via the front panel display.

The SC-E-100 unit can have one or two analogue inputs but the system can be expanded through the use of the optional SC-ISOSLICE slice I/O modules.

These modules connect automatically via the DIN rail mounted bus connector, allowing the easy addition and removal of extra I/O.

A built-in display allows local monitoring of the individual inputs and outputs, a useful commissioning and operations tool.

Additionally the Ethernet version has a built-in web page which can be used to display live data using any standard web browser.

Using the SC-E-100 is a simple way to implement an Ethernet measurement and control system or it can be used to add additional inputs and outputs to an existing Ethernet or RS232/485 installation.

Features

- MODBUS TCP or RTU Protocol
- Ethernet or RS232/485 Comms Port
- Universal Configurable Analogue Input
- IsoSlice I/O system for additional I/O up to 256 parameters
- Built in web-page for live monitoring of data

Inputs

DC/AC Current & Voltage

0-20mA, 4-20mA, 0-10mA into 15/30Ω

0-1V, 0-10V, 1-5V into 100kΩ / 1MΩ

0-25mV, 0-10mV, 0-500mV into >100MΩ

Min & Max Full Scale Ranges are:

DC Current	0 - 1mA	0 - 5A
Bipolar DC Current	±5mA	±10mA
DC Voltage	0 - 25mV	0 - 300V*
Bipolar DC Voltage	±5V	±10V
2 Wire Pot	0 - 125Ω	0 - 1kΩ
3 Wire Pot	0 - 1kΩ	0 - 100kΩ

* Note: For input voltages greater than 60Vdc a Divider unit must be specified.

Thermocouples

Types E,J,K,N,R,S,T,B linearised or non-linearised

Ranges: Wide range of inputs

Cold junction compensation (can be turned off)

Upscale or downscale t/c burnout options

Resistance Thermometers

2, 3 or 4 wire PT100 or PT1000, linearised or non-linearised

Ranges: Wide range of inputs

Upscale or downscale RTD burnout options

Additional I/O

Extra analogue and digital inputs and outputs are available through the SC-ISOSLICE I/O modules.



SPECIFICATIONS

Technical

Parameter	Min	Typ	Max	Comments
Supply Voltage	16V	24V	30V	
Supply Current (mA)	65		120	24Vdc supply
Volt Drop (mA input)		0.3		At 20mA input
Input Impedance (Volt)		1MΩ		
Input Impedance (mA)		15Ω		
Output Linearity Error		±0.01%	±0.05%	
Temp Coefficient			±100ppm/°C	
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage*	1kV			
Surge Voltage	2.5kV for 50μS			Transient of 10kV/μS

*Notes: The process input level is shown on the 4 digit LED display. Figures based on 24Vdc supply an ambient temperature of 20°C.

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 120g


Connection Details

1. Power supply -ve		
2. Power supply +ve		
3. Tx supply +ve		RTD 4 th wire
6.		RTD 3 rd wire
5. Input mA +ve	T/C +ve	RTD +ve
4. Input mA -ve	T/C -ve	RTD -ve



DIMENSIONS

All dimensions are in millimeters.

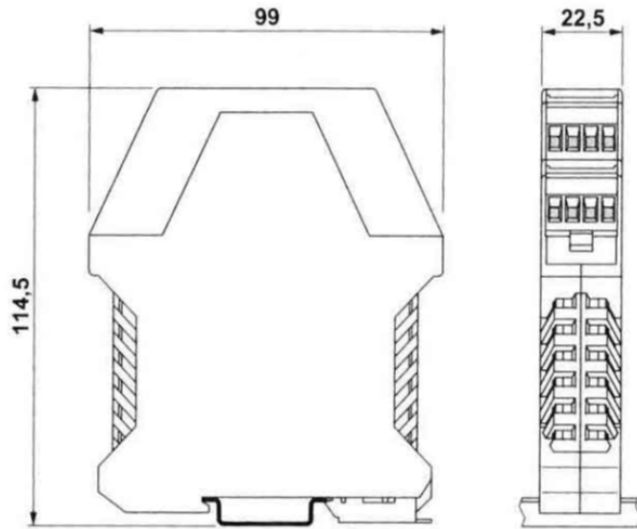



Please supply

Part Numbers	Comms
SC-E-100-RS232	RS232
SC-E-100-RS485	RS485
SC-E-100-E	Ethernet

Made in the UK

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
 c3w_sales@sensata.com
 Cynergy3 Components Ltd.
 7 Cobham Road,
 Ferndown Industrial Estate,
 Wimborne, Dorset,
 BH21 7PE, United Kingdom