

#### Features

- ◆ Semi-regulated output (load)
- ◆ Industry standard pinout
- ◆ High efficiency up to 87%
- ◆ I/O isolation voltage 3000 VDC
- ◆ Operationally reliable up to 5'000m altitude
- ◆ Operating temperature range -40°C to +85°C
- ◆ 3-year product warranty



The TRV-1 series are ultra miniature, 1 Watt DC/DC-converters with high 3000VDC I/O-isolation and semi load regulation. They are the ideal solution to power drivers and circuits where unregulated DC/DC converters do not meet the input voltage range at load change.

#### Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TRV 1-0511	5 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-0519		9 VDC	110 mA	86.5 %
TRV 1-0512		12 VDC	84 mA	87 %
TRV 1-0513		15 VDC	67 mA	87.5 %
TRV 1-1211	12 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-1219		9 VDC	110 mA	86 %
TRV 1-1212		12 VDC	84 mA	88 %
TRV 1-1213		15 VDC	67 mA	88 %
TRV 1-2411	24 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-2419		9 VDC	110 mA	86.5 %
TRV 1-2412		12 VDC	84 mA	87.5 %
TRV 1-2413		15 VDC	67 mA	87.5 %

### Input Specifications

Input current no load / full load	5 Vin models: 30 mA / 230 mA typ. 12 Vin models: 12 mA / 100 mA typ. 24 Vin models: 11 mA / 50 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Reflected input ripple current	5 Vin models: 11 mA typ. other models: 5 mA typ.
Input filter	internal capacitors
Recommended input fuse (slow blow type)	5 Vin models: 500 mA 12 Vin models: 200 mA 24 Vin models: 100 mA

### Output Specifications

Regulation	- Input variation - Load variation	1.2 % / 1 % change Vin see graph 1 on page 3
Ripple and noise (20 MHz Bandwidth)		60 mV pk-pk max.
Temperature coefficient		±0.02 %/K
Short circuit protection		limited 0.5 sec. max.
Capacitive load		220 µF max.

### General Specifications

Temperature ranges	- Operating - Case temperature - Storage	-40°C to +85°C (without derating) +105°C max. -50°C to +125°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>2'000'000 h
Isolation voltage (60 sec.)	- Input/Output	3'000 VDC
Isolation capacitance	- Input/Output	60 pF typ.
Isolation resistance	- Input/Output	>1'000 Mohm
Switching frequency		100 kHz typ. (frequency modulation)
Frequency change over line and load		-50 / +20 kHz max.
Altitude during operation		up to 5'000 m (16'400 ft) approved
Safety approvals		IEC 60950-1:2005 (2nd edition) + Am 1:2009 EN 60950-1:2006 + Am 1:2010 + Am 11:2009 <a href="http://www.tracopower.com/overview/trv1">www.tracopower.com/overview/trv1</a>
	- Certification documents	


**Supporting documents:** [www.tracopower.com/overview/trv1](http://www.tracopower.com/overview/trv1)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**Physical Specifications**

Casing material		non conductive plastic (UL 94V-0 rated)
Weight	- 5 & 12 Vin models - 24 Vin models	2.2 g (0.07 oz) 2.6 g (0.09 oz)
Soldering temperature		max. 260°C, 10 sec, 1.5 mm from case
Environmental compliance	- Reach - RoHS	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> RoHS directive 2011/65/EU

Graph 1: Load regulation

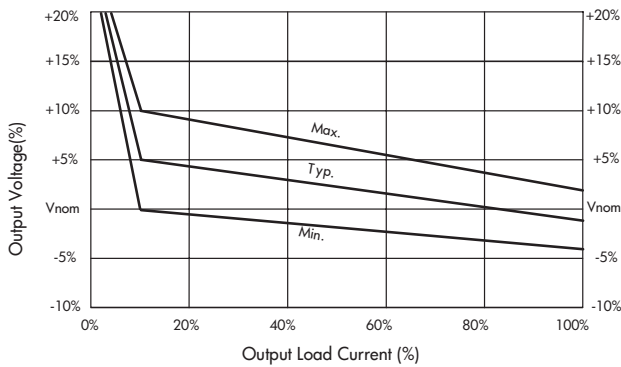

**Outline Dimensions**

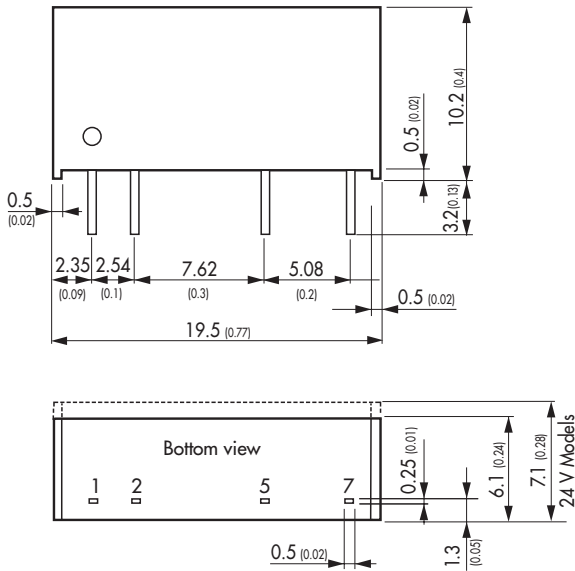

Pin-Out	
Pin	
1	+Vin (Vcc)
2	-Vin (GND)
5	-Vout
7	+Vout

Dimensions in [mm], ( ) = Inch  
Pin pitch tolerances:  $\pm 0.13$  ( $\pm 0.005$ )  
Case tolerances:  $\pm 0.25$  ( $\pm 0.01$ )

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)