

Disc type capacitors with leads
High voltage ceramic capacitors, commercial grade, safety standard approved



CD45 series



FEATURES

- Compliant with IEC and the safety standards of various countries.
- CD45 series meets reinforced insulation's safety standards. Since the withstand voltage is 4,000V AC, single-unit configuration is available for European class II devices.
- Flame-resistant reinforced outer insulation prevents fires, electrical shock, and other potential hazards.
- Conform to RoHS directive due to lead(Pb) free of lead-wire and internal solder material.
- Compatible with halogen-free external resin coating.

APPLICATION

Y capacitor for AC adapter, charger, power supplies

PART NUMBER CONSTRUCTION

| CD45 | -E | 2GA | 102 | M | - | □ | K | A |
|--------------|-----------------------------|-----------------------------------|-------------------------|---------------------------|---|----------------------------|----------------------------|---------------|
| Series name* | Temperature characteristics | Rated voltage | Nominal capacitance | Capacitance tolerance | Lead-wire type | | Application classification | Internal code |
| SL | +350 to -1,000ppm/°C | 2GA X1: 440V AC Y1: 400V AC | 100 10pF 102 1,000pF | J ±5% K ±10% M ±20% | G Long lead N Short lead V Taping | K Safety standard approved | A Halogen-free | |
| -B | ±10% | | 222 2,200pF | | | | | |
| -E | +20, -55% | | | | | | | |

* Please refer to P-3 about the product dimensions.

OPERATING TEMPERATURE RANGE


| Temperature characteristics | Operating temperature (°C) | Storage temperature (°C)* |
|-----------------------------|----------------------------|---------------------------|
| SL | -40 to 125 | -40 to 125 |
| B | -40 to 125 | -40 to 125 |
| E | -40 to 125 | -40 to 125 |

The maximum operating temperature of +125°C includes capacitor self-generated heat of up to 20°C.

* After capacitor is mounted on board, the storage temperature range is applied.

STANDARD LEAD-WIRE SHAPES

Dimensions in mm

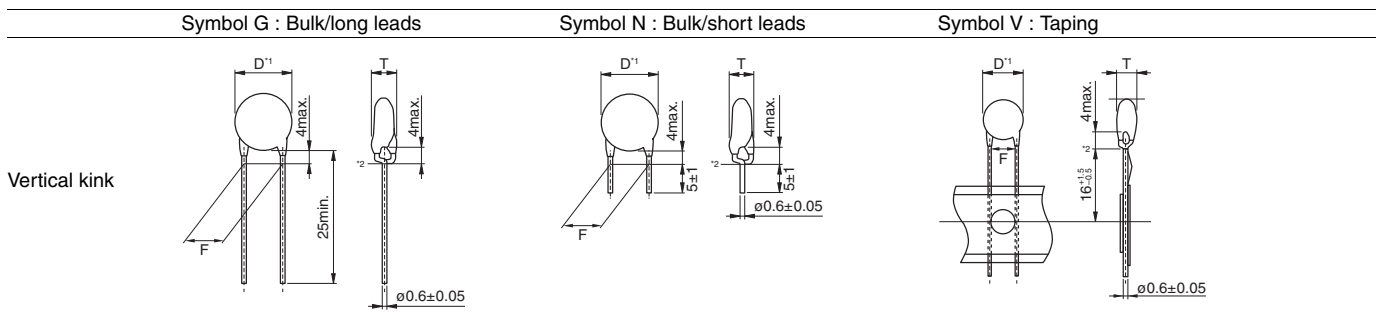

TDK's standard product is vertical kink. TDK recommends short leads for bulk products.

*1 Body diameter (D) is reference value if D is smaller than maximum dimension of lead to lead distance (F).

*2 Coating on leads shall not extend beyond the bottom of vertical kink.

- RoHS Directive Compliant Product: See the following for more details. <https://product.tdk.com/en/environment/rohs/index.html>
- Halogen-free: Indicate that Cl content is less than 900ppm, Br content is less than 900ppm, and that the total Cl and Br content is less than 1500ppm.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (1/5)
Please note that the contents may change without any prior notice due to reasons such as upgrading.

20210802

leaddisc_commercial_cd45_en


Overview of CD45 series

CERTIFIED STATUS OF VARIOUS COUNTRIES

| Safety standard | IEC standard No. | Standard No. | Temperature characteristics | Sub-class | Rated voltage | Approval report No.* | |
|-----------------|------------------|--------------|-----------------------------|-----------|--------------------------|----------------------|----------------|
| | | | | | | Taiwan | Xiamen |
| ENEC | | EN 60384-14 | | | | ENEC-01048 | |
| UL | | UL60384-14 | | | | E37861 | |
| cUL/CSA | | AS3250 | | X1, Y1 | X1:440V AC Y1:400V AC | CS6268 | |
| SAA | IEC 60384-14 | IEC 60384-14 | SL,B,E | | | CQC14001112767 | CQC14001112447 |
| CQC | | IEC 60384-14 | | | | SZ03001-12002 | SU03047-12002 |
| KTL | | K60384-14 | | X1 Y1 | 440V AC 400V AC | SZ03001-12004 | SU03047-12004 |

* Certificate numbers shall be changed owing to the revisions of the related standards and renewal of certificate.




RECOMMENDED FLOW PROFILE

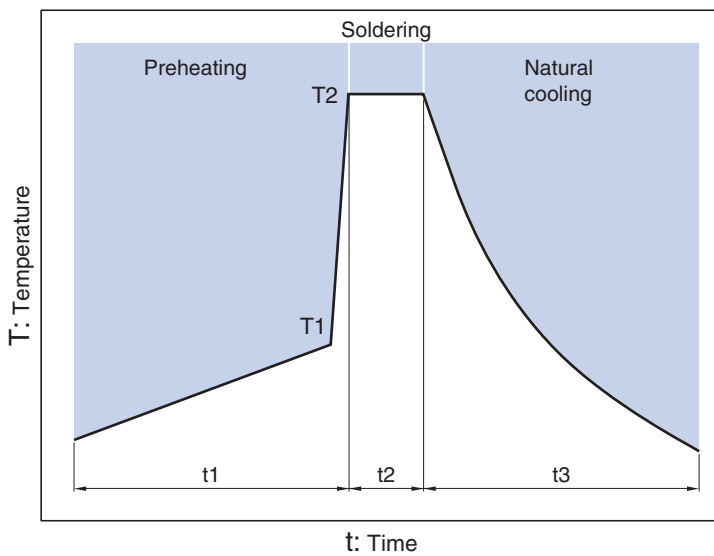

| Preheating | | Peak | | Natural cooling |
|------------|------------|-------|-------------|-----------------|
| Temp. | Time | Temp. | Time | Time |
| T1 | t1 | T2 | t2 | t3 |
| 110°C min. | 30 to 60s. | 260°C | Within 10s. | Over 60s. |

CD45 type

MARKINGS

| Item | Markings | Description | Marking examples |
|-------------------------|---|--------------------------|---|
| 1.Series | CD | CD45 series | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Front</p>  </div> <div style="text-align: center;"> <p>Back</p>  </div> </div> <p>(Marking position is reference.)</p> |
| 2.Nominal capacitance | 10 | 10pF | |
| 3.Capacitance tolerance | J | ±5% | |
| 4.Rated voltage Eac | 440~X1 400~Y1 | X1:440V AC Y1:400V AC | |
| 5.TDK's trademark |  | Production base code | |
| 6.Date code | 04 | 2020.4* | |

* Year and month of production: last digit of year + month denoted by 1, 2, 3, 4, 5, 6, 7, 8, 9, O (October), N (November), or D (December).

*The expression has become simplified due to a revision in the standards.

RATED VOLTAGE Eac: X1=440V, Y1=400V

CAPACITANCE AND DIMENSIONS


| Temperature characteristics | Capacitance | Capacitance tolerance | Dimensions (mm) | | | | Part numbers | | |
|-----------------------------|-------------|-----------------------|-----------------|-------|---------------------|-----------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| | | | Dmax. * | Tmax. | F (applied to bulk) | F (applied to taping) | Bulk/long leads (Symbol: G) | Bulk/short leads (Symbol: N) | Taping (Symbol: V) |
| SL | 10pF | ±5% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA100J-GKA | CD45SL2GA100J-NKA | CD45SL2GA100J-VKA |
| SL | 15pF | ±5% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA150J-GKA | CD45SL2GA150J-NKA | CD45SL2GA150J-VKA |
| SL | 22pF | ±5% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA220J-GKA | CD45SL2GA220J-NKA | CD45SL2GA220J-VKA |
| SL | 33pF | ±5% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA330J-GKA | CD45SL2GA330J-NKA | CD45SL2GA330J-VKA |
| SL | 47pF | ±5% | (8.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA470J-GKA | CD45SL2GA470J-NKA | CD45SL2GA470J-VKA |
| SL | 68pF | ±5% | (9.0) | 6.0 | 10+2,-1 | 10±1 | CD45SL2GA680J-GKA | CD45SL2GA680J-NKA | CD45SL2GA680J-VKA |
| B | 100pF | ±10% | (6.5) | 6.0 | 10+2,-1 | 10±1 | CD45-B2GA101K-GKA | CD45-B2GA101K-NKA | CD45-B2GA101K-VKA |
| B | 150pF | ±10% | (6.5) | 6.0 | 10+2,-1 | 10±1 | CD45-B2GA151K-GKA | CD45-B2GA151K-NKA | CD45-B2GA151K-VKA |
| B | 220pF | ±10% | (6.5) | 6.0 | 10+2,-1 | 10±1 | CD45-B2GA221K-GKA | CD45-B2GA221K-NKA | CD45-B2GA221K-VKA |
| B | 330pF | ±10% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45-B2GA331K-GKA | CD45-B2GA331K-NKA | CD45-B2GA331K-VKA |
| B | 470pF | ±10% | (8.0) | 6.0 | 10+2,-1 | 10±1 | CD45-B2GA471K-GKA | CD45-B2GA471K-NKA | CD45-B2GA471K-VKA |
| E | 680pF | ±20% | (6.5) | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA681M-GKA | CD45-E2GA681M-NKA | CD45-E2GA681M-VKA |
| E | 1,000pF | ±20% | (7.0) | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA102M-GKA | CD45-E2GA102M-NKA | CD45-E2GA102M-VKA |
| E | 1,500pF | ±20% | (8.0) | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA152M-GKA | CD45-E2GA152M-NKA | CD45-E2GA152M-VKA |
| E | 2,200pF | ±20% | (9.0) | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA222M-GKA | CD45-E2GA222M-NKA | CD45-E2GA222M-VKA |
| E | 3,300pF | ±20% | (11.0) | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA332M-GKA | CD45-E2GA332M-NKA | CD45-E2GA332M-VKA |
| E | 4,700pF | ±20% | 13.0 | 6.0 | 10+2,-1 | 10±1 | CD45-E2GA472M-GKA | CD45-E2GA472M-NKA | CD45-E2GA472M-VKA |

* The values in parentheses "()" are reference values.

Click the part number for details.

• Please refer to p-4 about the taping dimensions.

• For more information about products with other capacitance or other data, please contact us.


 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (3/5)
Please note that the contents may change without any prior notice due to reasons such as upgrading.

20210802

leaddisc_commercial_cd45_en


CD45 type

TAPING DIMENSIONS

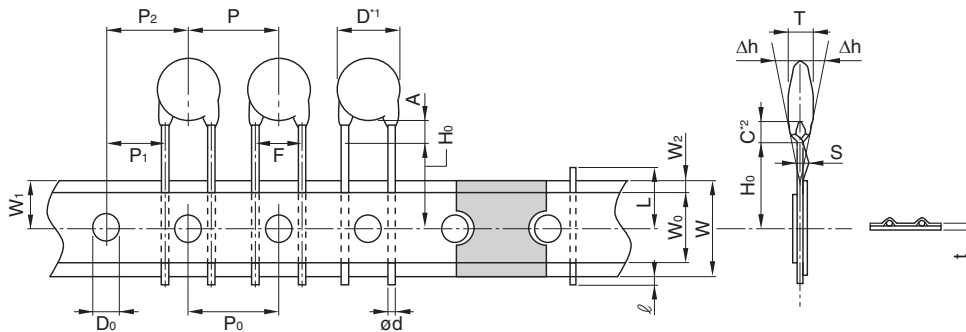

| Item | Symbols | Dimensions (mm) | Remarks |
|--|----------------|-----------------|--|
| Body diameter | D | Refer to P-3 | *1 Body diameter (D) is reference value if D is smaller than maximum dimension of lead to lead distance (F). |
| Body thickness | T | Refer to P-3 | |
| Lead-wire diameter | ød | 0.6±0.05 | |
| Pitch of component | P | 15.0±1.0 | Including the slant of body |
| Feed hole pitch | P ₀ | 15.0±0.3 | Excepting the tape splicing part |
| Feed hole center to lead-wire | P ₁ | 10.0±0.7 | |
| Feed hole center to component center | P ₂ | 15.0±1.3 | Including the slanting body due to bending lead-wire |
| Lead-to lead distance | F | 10.0±1.0 | Measuring point is bottom kink |
| Component alignment | Δh | 0±2.0 | Including the slanting body due to bending lead-wire |
| Carrier tape width | W | 18.0+1.0,-0.5 | |
| Adhesive tape width | W ₀ | 10.0 Min. | |
| Hole position | W ₁ | 9.0±0.5 | |
| Adhesive tape position | W ₂ | 4.0 Max. | Adhesive tape do not stick out the tape |
| Bottom of kink from tape center | H ₀ | 16.0+1.5,-0.5 | |
| Lead-wire protrusion | ℓ | 1.0 Max. | |
| Feed hole diameter | D ₀ | 4.0±0.2 | |
| Carrier tape thickness (Including adhesive tape) | t | 0.6±0.3 | Including adhesive tape |
| Length of snapped lead-wire | L | 11.0 Max. | |
| Coating on lead-wire | C | 4.0 Max. | *2 Coating on leads shall not extend beyond the bottom of vertical kink. |
| Height of kink | A | 4.0 Max. | Measuring point is bottom kink |
| Spring action | S | 2.0 Max. | |

AMMO PACK INNER BOX SIZE

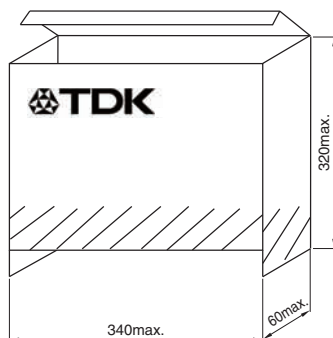

Dimensions in mm

PACKAGE QUANTITY

| Type | Package quantity | |
|------|---------------------|-----------------------|
| | Bulk (pieces / bag) | Taping (pieces / box) |
| CD45 | 1000 | 1000 |

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

REMINDERS

- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and product temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- | | |
|---|--|
| (1) Aerospace/aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

- Please refer to the guideline of notabilia for fixed ceramic capacitors issued by JEITA(Japan Electronics and Information Technology Association, EIAJ RCR-2335).

This guideline describes general precautions* for using fixed ceramic capacitors. Please carefully confirm it and use capacitors safely.

* Items for check, explanation/reason/concrete example and failure examples, etc.

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.