



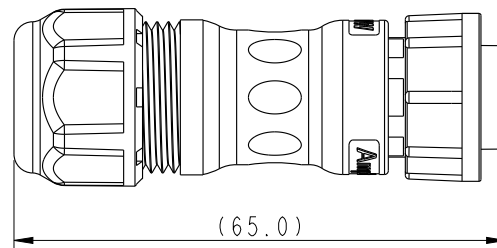
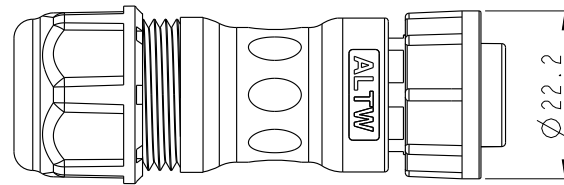
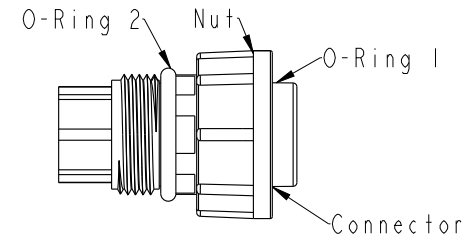

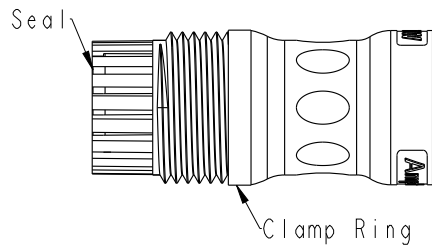


7	8
REV.	DESCRIPTION



Pin Assignments
Front View

UNIT:mm



TOLERANCE

±0.5 mm

TITLE
Circular C-Size Field Installable
Cable Type F Conn

SCALE	8:5	SIZE	A4	SHEET	1	OF	2
REV.	A	WC-REV.	A.3	QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

Ordering Information:

ACBD-08BFFC-LL7XP0

Material Specification:
 * Connector: Nylon+GF, Black.
 * Pins: Copper Alloy, Gold Plated.
 * Seal & O-Ring: Silicone, Gray.
 * UL Rated: UL 94V-0, fl.
 * RoHS Compliant.

A: With Red&Yellow&Blue Color Seal
 S: With Red Color Seal, Cable OD 6.0~8.0mm.
 M: With Yellow Color Seal, Cable OD 8.0~10.0mm.
 L: With Blue Color Seal, Cable OD 10.0~12.0mm.

Electrical Specification:
 * Contact Resistance: 10mΩ Max.
 * Insulation Resistance: 100MΩ Min.
 * Dielectric Withstand Voltage: 1,600 Vac.

Mechanical Specification:
 * Durability: 1000 Cycles.
 * Tensile strength: 10 kgf.
 * Wire Conductor:
 5A: 22AWG~20AWG
 10A: 18AWG~16AWG
 * Wire Insulation OD:
 5A: 1.9mm Max.
 10A: 2.7mm Max.
 * Torque Force for Clamp Ring: 6~8 kgf-cm
 * Torque Force for Seal Nut: 6~8 kgf-cm

Environmental Specification:
 * Waterproof Rating: IP67(Mated)
 * Temperature Range: -40°C to 105°C.
 * Salt Spray: Mated, 1000 Hours.
 * Safety Compliance: UL 1977.

UNIT:mm			TITLE Circular C-Size Field Installable Cable Type F Conn
TOLERANCE ±0.5 mm			SCALE 8:5 SIZE A4 SHEET 2 OF 2
REV. A	WC-REV. A.3	QC: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Peng	DATE 2018-12-15
DWG NO ACBD-08BFFC-LL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15