



Contact module with 1 contact element, 1 NC, spring-type terminal, for front plate mounting, Minimum order quantity 5 or a multiple thereof

|   |  |
|---|--|
| <b>product brand name</b>                             | SIRIUS ACT   |
| <b>product designation</b>                            | Contact module   |
| <b>product type designation</b>                       | 3SU1   |
| <b>General technical data</b>                         |  |
| product function positive opening                     | Yes  |
| insulation voltage rated value                        | 500 V  |
| <b>degree of pollution</b>                            | 3  |
| <b>type of voltage</b>                                |  |
| • of the operating voltage                            | AC/DC  |
| • of the input voltage                                | AC/DC  |
| <b>surge voltage resistance rated value</b>           | 6 kV   |
| protection class IP                                   |  |
| • of the enclosure                                    | IP40   |
| • of the terminal                                     | IP20   |
| <b>shock resistance</b>                               |  |
| • acc. to IEC 60068-2-27                              | Sinusoidal half-wave 50g / 11 ms   |
| • for railway applications acc. to DIN EN 61373       | Category 1, Class B  |
| <b>vibration resistance</b>                           |  |
| • acc. to IEC 60068-2-6                               | 10 ... 500 Hz: 5g  |
| • for railway applications acc. to DIN EN 61373       | Category 1, Class B  |
| <b>operating frequency maximum</b>                    | 3 600 1/h  |
| mechanical service life (switching cycles) typical    | 10 000 000   |
| electrical endurance (switching cycles) typical       | 10 000 000   |
| <b>thermal current</b>                                | 10 A   |
| <b>reference code acc. to IEC 81346-2</b>             | S  |
| <b>continuous current of the C characteristic MCB</b> | 10 A   |
| • operating voltage at AC                             |  |
| — at 50 Hz rated value                                | 5 ... 500 V  |
| — at 60 Hz rated value                                | 5 ... 500 V  |
| • operating voltage at DC rated value                 | 5 ... 500 V  |
| <b>Power Electronics</b>                              |  |
| <b>contact reliability</b>                            | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
| <b>Auxiliary circuit</b>                              |  |
| <b>design of the contact of auxiliary contacts</b>    | Silver alloy   |
| <b>number of NC contacts for auxiliary contacts</b>   | 1  |
| • lagging switching                                   | 0  |

|   |       |
|---|-------|
| <b>number of NO contacts for auxiliary contacts</b> | 0     |
| • leading contact                                   | 0     |
| <b>operational current at AC-12</b>                 |       |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 10 A  |
| • at 110 V rated value                              | 10 A  |
| • at 230 V rated value                              | 8 A   |
| • at 400 V rated value                              | 8 A   |
| <b>operational current at AC-15</b>                 |       |
| • at 24 V rated value                               | 6 A   |
| • at 48 V rated value                               | 6 A   |
| • at 110 V rated value                              | 6 A   |
| • at 230 V rated value                              | 6 A   |
| • at 400 V rated value                              | 3 A   |
| • at 500 V rated value                              | 1.4 A |
| <b>operational current at DC-12</b>                 |       |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 5 A   |
| • at 110 V rated value                              | 2.5 A |
| • at 230 V rated value                              | 1 A   |
| • at 400 V rated value                              | 0.3 A |
| • at 500 V rated value                              | 0.3 A |
| <b>operational current at DC-13</b>                 |       |
| • at 24 V rated value                               | 3 A   |
| • at 48 V rated value                               | 1.5 A |
| • at 110 V rated value                              | 0.7 A |
| • at 230 V rated value                              | 0.3 A |
| • at 400 V rated value                              | 0.1 A |
| • at 500 V rated value                              | 0.1 A |

### Connections/ Terminals

|   |                                     |
|---|-------------------------------------|
| <b>type of electrical connection</b>                | spring-loaded terminals             |
| <b>type of connectable conductor cross-sections</b> |                                     |
| • solid without core end processing                 | 2x (0.25 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded with core end processing          | 2x (0.25 ... 0.75 mm <sup>2</sup> ) |
| • finely stranded without core end processing       | 2x (0.25 ... 1.5 mm <sup>2</sup> )  |
| • at AWG cables                                     | 2x (24 ... 16)                      |

### Ambient conditions

|   |   |
|---|---|
| • ambient temperature during operation                    | -25 ... +70 °C  |
| • ambient temperature during storage                      | -40 ... +80 °C  |
| environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3C3 (without salt spray), 3K6 (with relative humidity of 10 ... 95%, no condensation in operation permitted) |

### Installation/ mounting/ dimensions

|                              |                      |
|------------------------------|----------------------|
| <b>fastening method</b>      | front panel mounting |
| • of modules and accessories | Front plate mounting |
| <b>height</b>                | 36 mm                |
| <b>width</b>                 | 9.8 mm               |
| <b>depth</b>                 | 27.7 mm              |

### Certificates/ approvals

#### General Product Approval



[KC](#)



#### Declaration of Conformity

[Miscellaneous](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Miscellaneous](#)



**Test Certificates**

**Marine / Shipping**

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



**Marine / Shipping**

**other**



[Confirmation](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1AA10-3CA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1AA10-3CA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1AA10-3CA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1400-1AA10-3CA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1AA10-3CA0&lang=en)

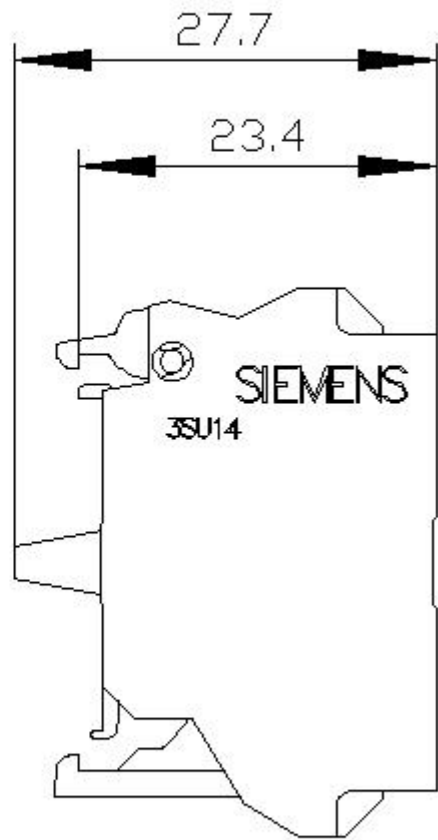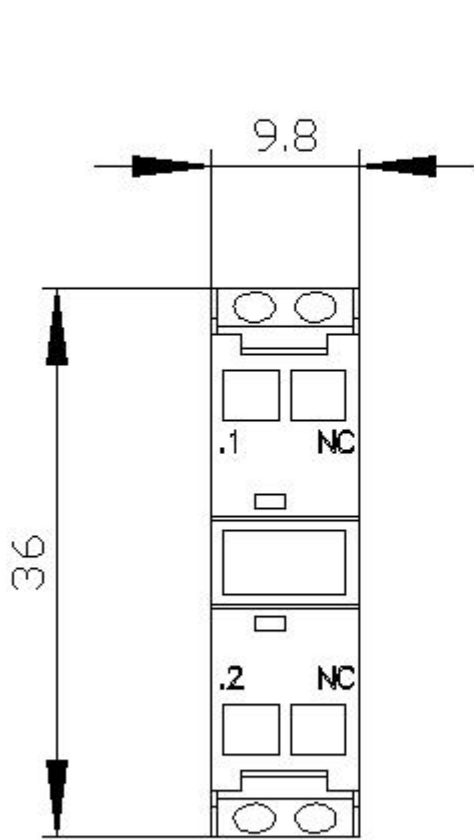

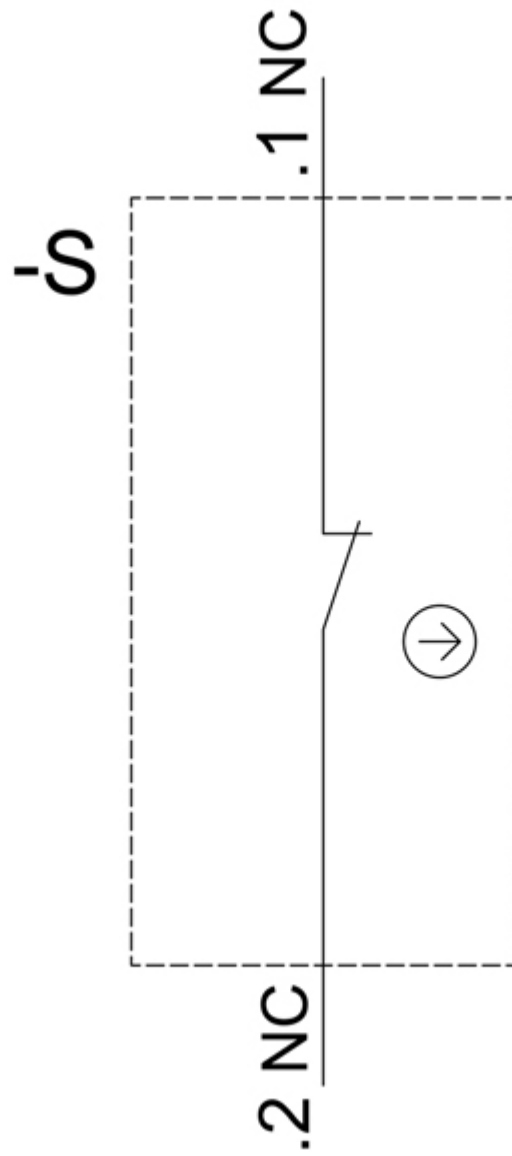

last modified:

12/18/2020 