

No. of Contacts	Dimensions	
	A	B
2	1.00	2.50
3	2.00	3.50
4	3.00	4.50
5	4.00	5.50
6	5.00	6.50
7	6.00	7.50
8	7.00	8.50
9	8.00	9.50
10	9.00	10.50
11	10.00	11.50
12	11.00	12.50
13	12.00	13.50
14	13.00	14.50
15	14.00	15.50
16	15.00	16.50
17	16.00	17.50
18	17.00	18.50
19	18.00	19.50
20	19.00	20.50
21	20.00	21.50
22	21.00	22.50
23	22.00	23.50
24	23.00	24.50
25	24.00	25.50
26	25.00	26.50
27	26.00	27.50
28	27.00	28.50
29	28.00	29.50
30	29.00	30.50
31	30.00	31.50
32	31.00	32.50
33	32.00	33.50
34	33.00	34.50
35	34.00	35.50
36	35.00	36.50
37	36.00	37.50
38	37.00	38.50
39	38.00	39.50
40	39.00	40.50

Specifications 规格

Material 物料

Contact 端子物料: Phosphor Bronze
 Insulator 绝缘体物料:
 Standard 标准物料: Polymer 聚合物, LCP, UL 94-V0

Electrical 电气

Current Rating 电流额定值: 1 Amp Per Pin
 Insulation Resistance 绝缘电阻值: 1000 MΩ min
 Contact Resistance 接触电阻值: 40 mΩ max.
 Dielectric Withstand Voltage 耐电压: AC 300 V

Mechanical & Environmental 机械 & 环境


Operating Temperature 工作温度: -40°C to +105°C

Soldering Process 可焊性:

LCP (Standard 标准物料) -
 IR Reflow 回流焊: 260°C for 10 sec.
 Manual Solder 人工焊接: 350°C for 3-5 sec

Mates with 配套之公头 (Subject to pin length 在端子长度适合的条件下)

BC020 BC025 BC030 BC032 BC090
 Perfect Planar Mating with
 BC034 (Only Insulator Height V=1.50mm)

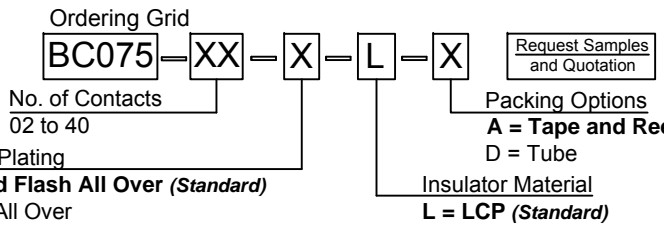

Part Number		Product Description	
BC075		1.00mm Pitch Socket, Single Row, Surface Mount, Horizontal	
Drawing Date		20th May 2008	
By	CC	Tolerances (Except as Noted)	Units:
Detail	BC075 C PCN	Length: X. ± 0.30 X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.10	Metric (mm)
Revision	C2	Angle: X.° ± 5° X.X° ± 3° X.XX° ± 2° X.XXX° ± 1°	RoHS COMPLIANT 2011/05/09 Deca-BDE
Date	06/07/17	3rd Angle Projection	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

GCT
www.gct.co

Not to Scale | Drawn By ASE | Sheet No. 1/1