


Sep.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

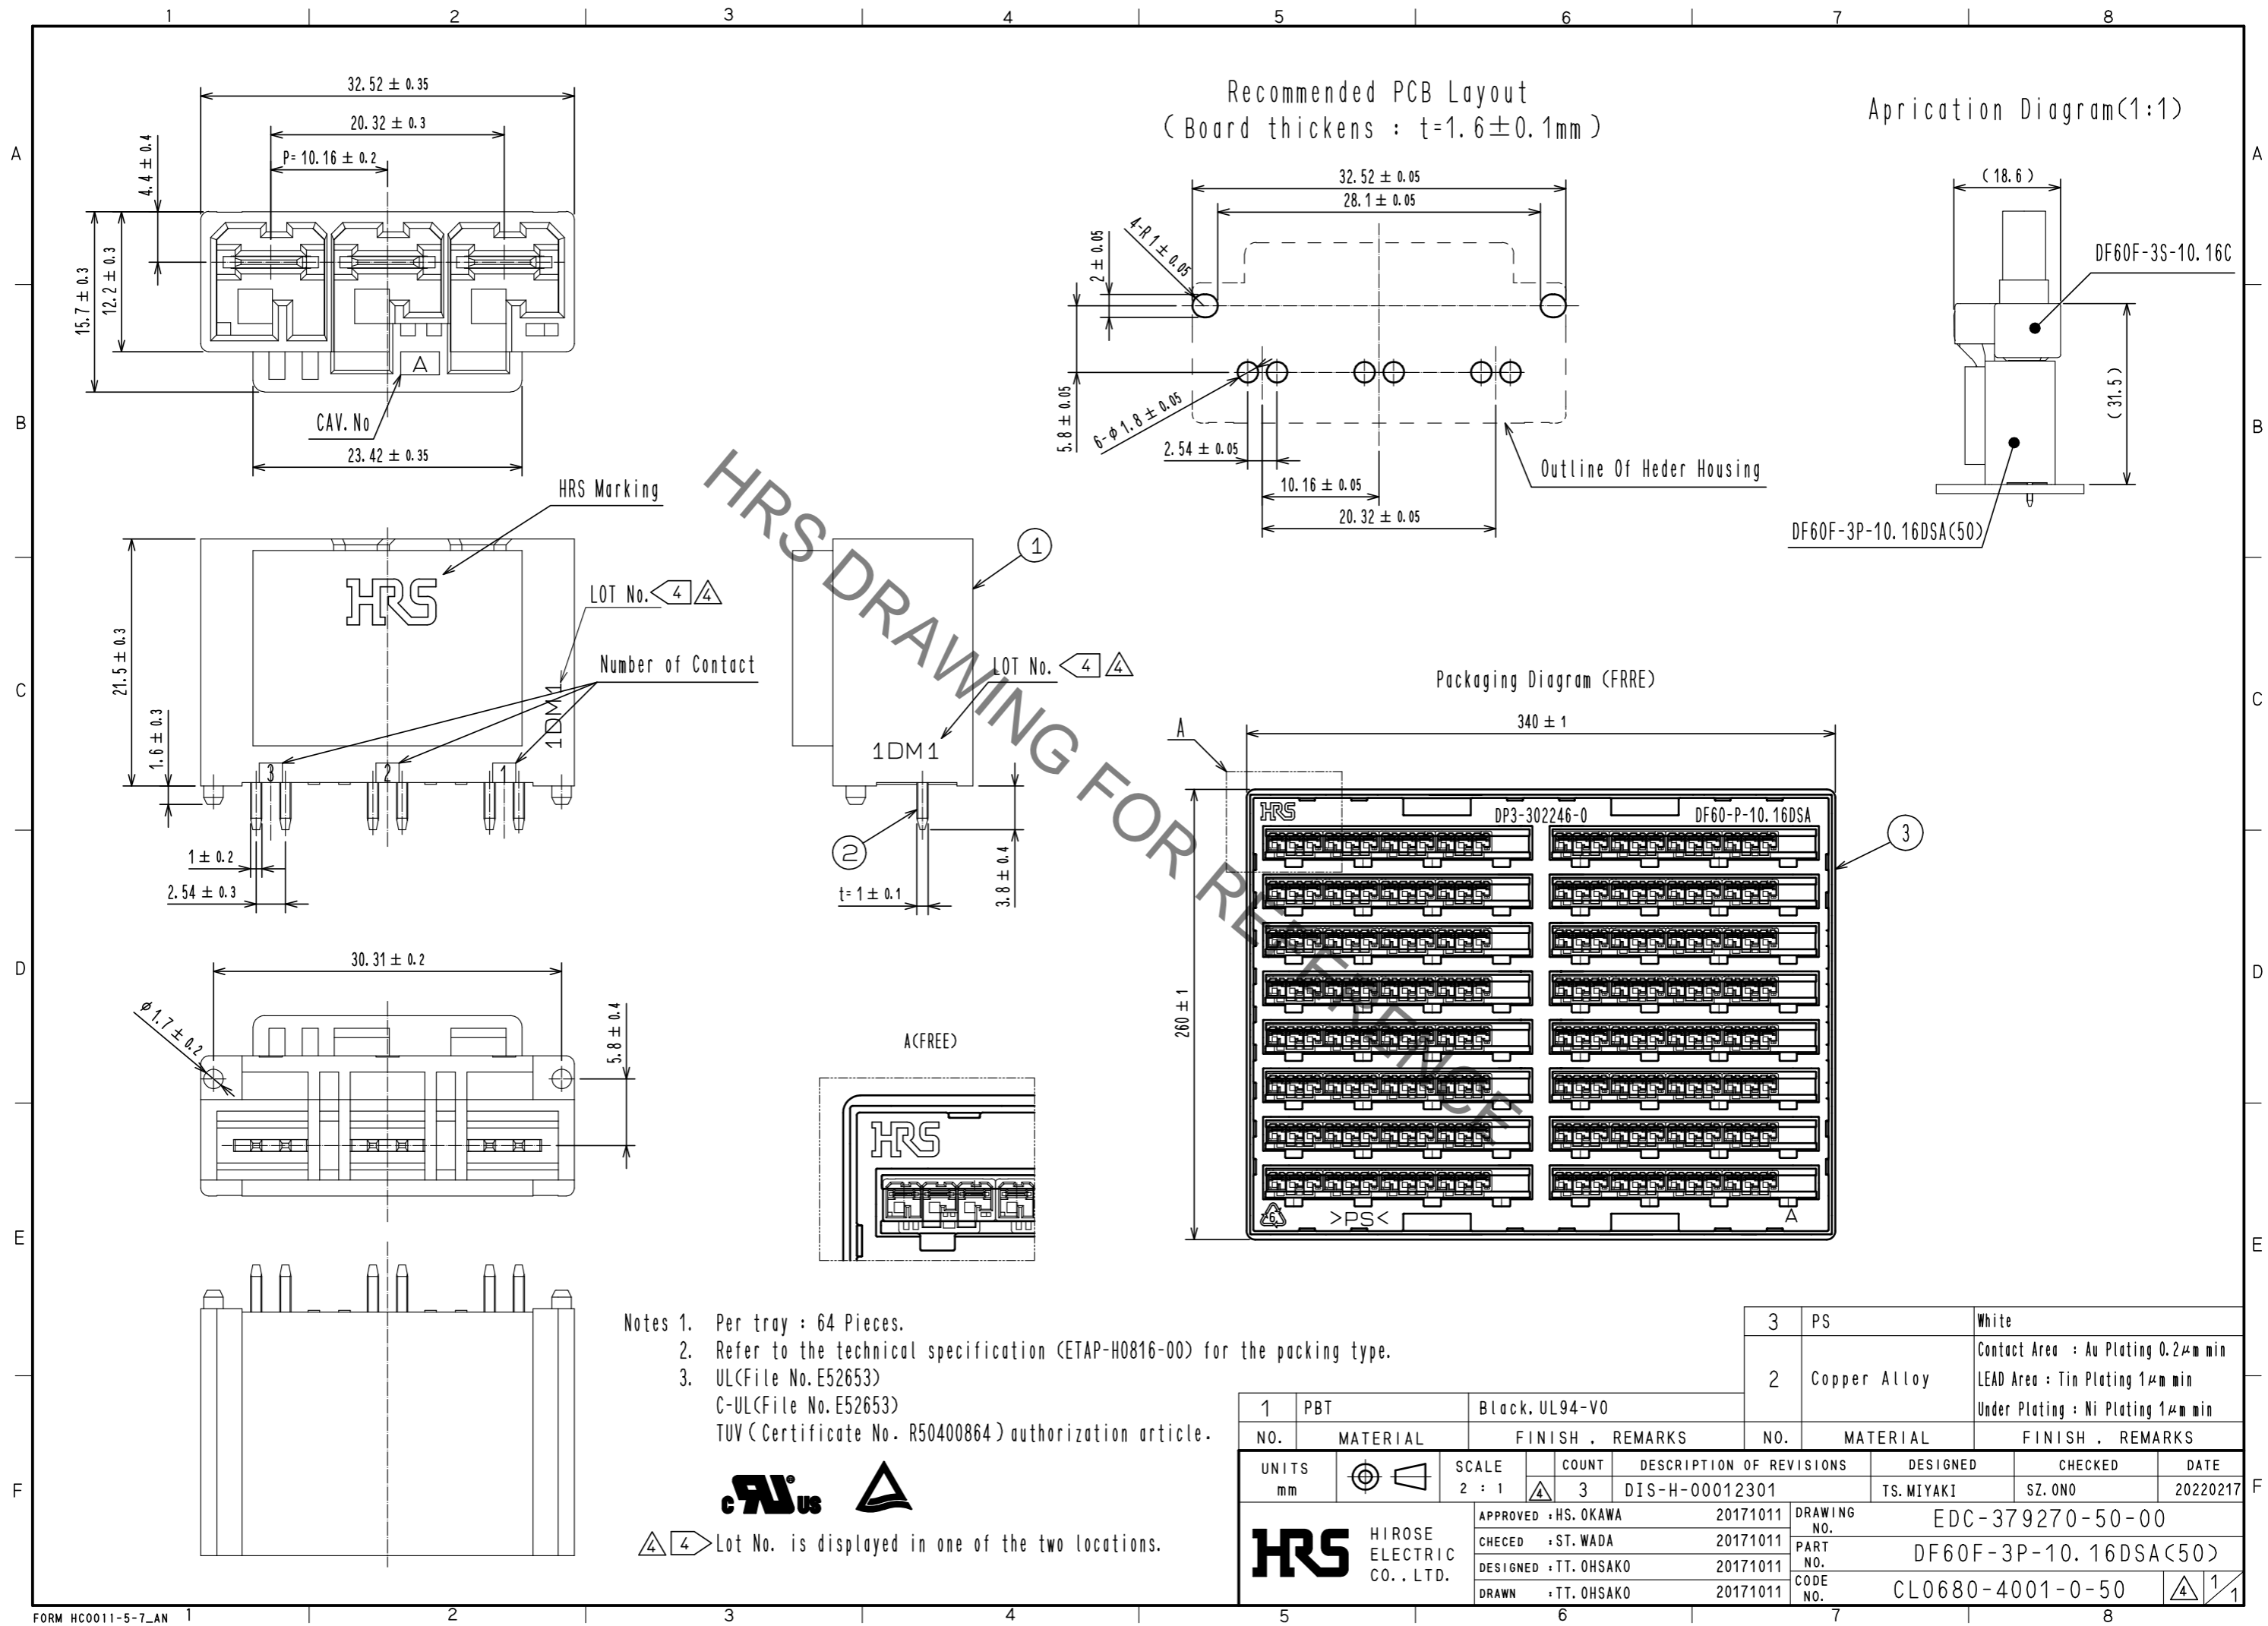

- Notes 1. Per tray : 64 Pieces.  
 2. Refer to the technical specification (ETAP-H0816-00) for the packing type.  
 3. UL( File No. E52653)  
 C-UL( File No. E52653)  
 TUV ( Certificate No. R50400864 ) authorization article.

Lot No. is displayed in one of the two locations.

1	PBT	Black, UL94-V0	3	PS	White		
2	Copper Alloy		2	Copper Alloy	Contact Area : Au Plating 0.2 $\mu\text{m}$ min LEAD Area : Tin Plating 1 $\mu\text{m}$ min Under Plating : Ni Plating 1 $\mu\text{m}$ min		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-H-00012301	DESIGNED TS.MIYAKI	CHECKED SZ.ONO	DATE 20220217
		APPROVED : HS. OKAWA	20171011	DRAWING NO. EDC-379270-50-00			
		CHECED : ST. WADA	20171011	PART NO. DF60F-3P-10.16DSA(50)			
		DESIGNED : TT. OHSAKO	20171011	CODE NO. CL0680-4001-0-50			
		DRAWN : TT. OHSAKO	20171011				