

1

2

3

4

5


TECHNICAL CHARACTERISTICS

MATERIAL
COLOR: BLACK
STYLE: UL1007

ENVIRONMENTAL
OPERATING TEMPERATURE: -20°C UP TO 80°C
COMPLIANCE: LEAD FREE AND ROHS

WIRE DIMENSION
AWG: 24

PACKAGING
10 PCS/BAG

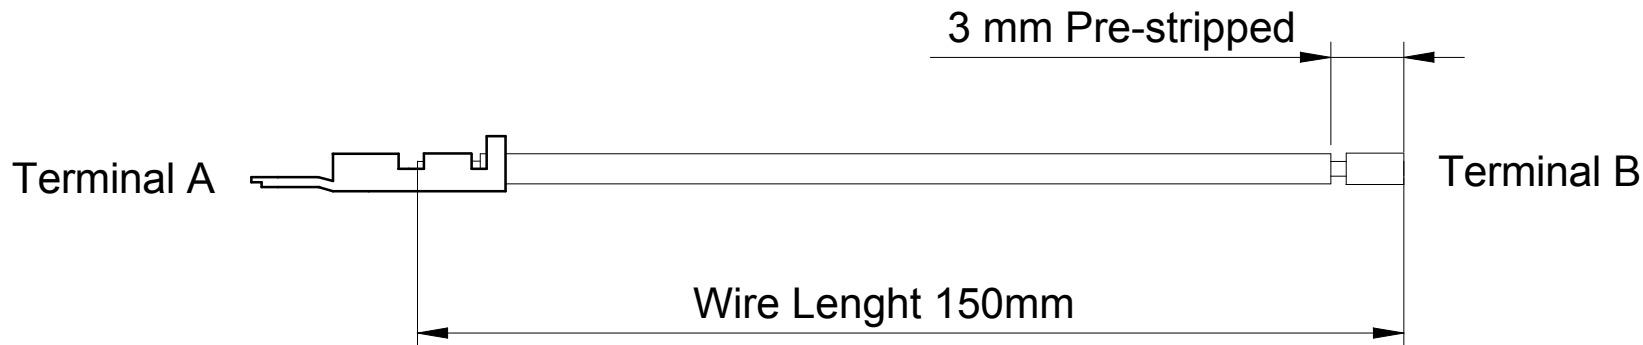

| | |
|------------|----------------|
| Terminal A | 662 002 137 22 |
| Terminal B | Pre-stripped |

RoHS Compliant

| | | | |
|-----|-----------|------|----|
| G | | | |
| F | | | |
| E | | | |
| D | | | |
| C | | | |
| B | | | |
| A | 18-OCT-11 | PDF | GG |
| REV | DATE | FILE | BY |

PROJECTION:

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM
SCALE:
SHEET: 1/2
DRAW: QL

DESCRIPTION: WR-MPC3 MALE PRE-CRIMPED CABLE
WERI PART NO: 662 200 124 015

SIZE
A4

1

2

3

4

5

A



B

C

D

Note:
 1.Dimension
 Carton Size:40*30*20(CM)
 2.Quantity: 5000 Pcs/Carton



| | | | | | | | | |
|----------------|------|------|----|--|---|---|---|-------------------|
| RoHS Compliant | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | DESCRIPTION: WR-MPC3 MALE PRE-CRIMPED CABLE | SIZE A4 |
| G | | | | | | | | |
| F | | | | | | | | |
| E | | | | | | | | |
| D | | | | APPROVAL: RJ | UNIT: MM | WERI PART NO: 662 200 124 015 | | |
| C | | | | | SCALE: | | | |
| B | | | | | SHEET: 2/2 | | | |
| A | | | | DRAW: QL | | | | |
| REV | DATE | FILE | BY | | | | | |