

KNIPEX Twistor16

Self-adjusting crimping pliers for end sleeves (ferrules) with rotating crimp head

97
53


Crimp head can be freely rotated 360°, with 8 locking positions
Square crimp profile, high capacity range of 26 to 6 AWG (0.14 to 16 mm²)

End sleeves (ferrules) can be crimped from almost any working position

- > crimping pliers adjust automatically to different diameters
- > crimp opening is accessible from both sides, extra-long end sleeves can be fed in
- > crimping of twin end sleeves (ferrules) up to 2 x 6 mm² possible
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > light and handy tool, manual force reinforced by toggle lever mechanism
- > chrome vanadium electric steel in special quality; oil-hardened




97 53 18




Crimp head can be rotated 360°



Crimp head can be rotated 360° for optimal accessibility, even in confined spaces

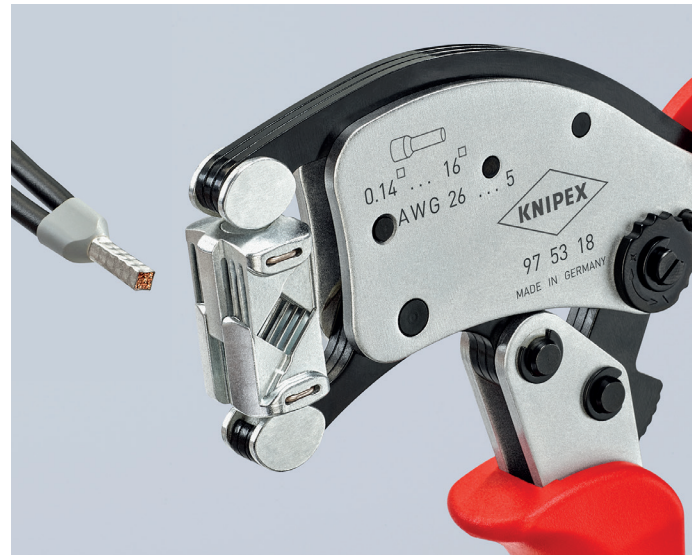

Twin end sleeves (ferrules) up to 2 x 6 mm² can be crimped without adjustment



Crimp end sleeves (ferrules) fully automatically within the capacity range of 26 to 6 AWG (0.14 to 16 mm)



Uniquely flexible: connectors can be inserted in the rotatable crimp head from almost any position



Product Number	Packaging	↔ Inch mm	Capacity mm ²	AWG	Number of crimping positions	⚖ lbs
97 53 18		8 200	0.14 - 16	26 - 6	1	1.05